


LEDEMNY

NY LED EMERGENCY UNIT

DIMENSIONS

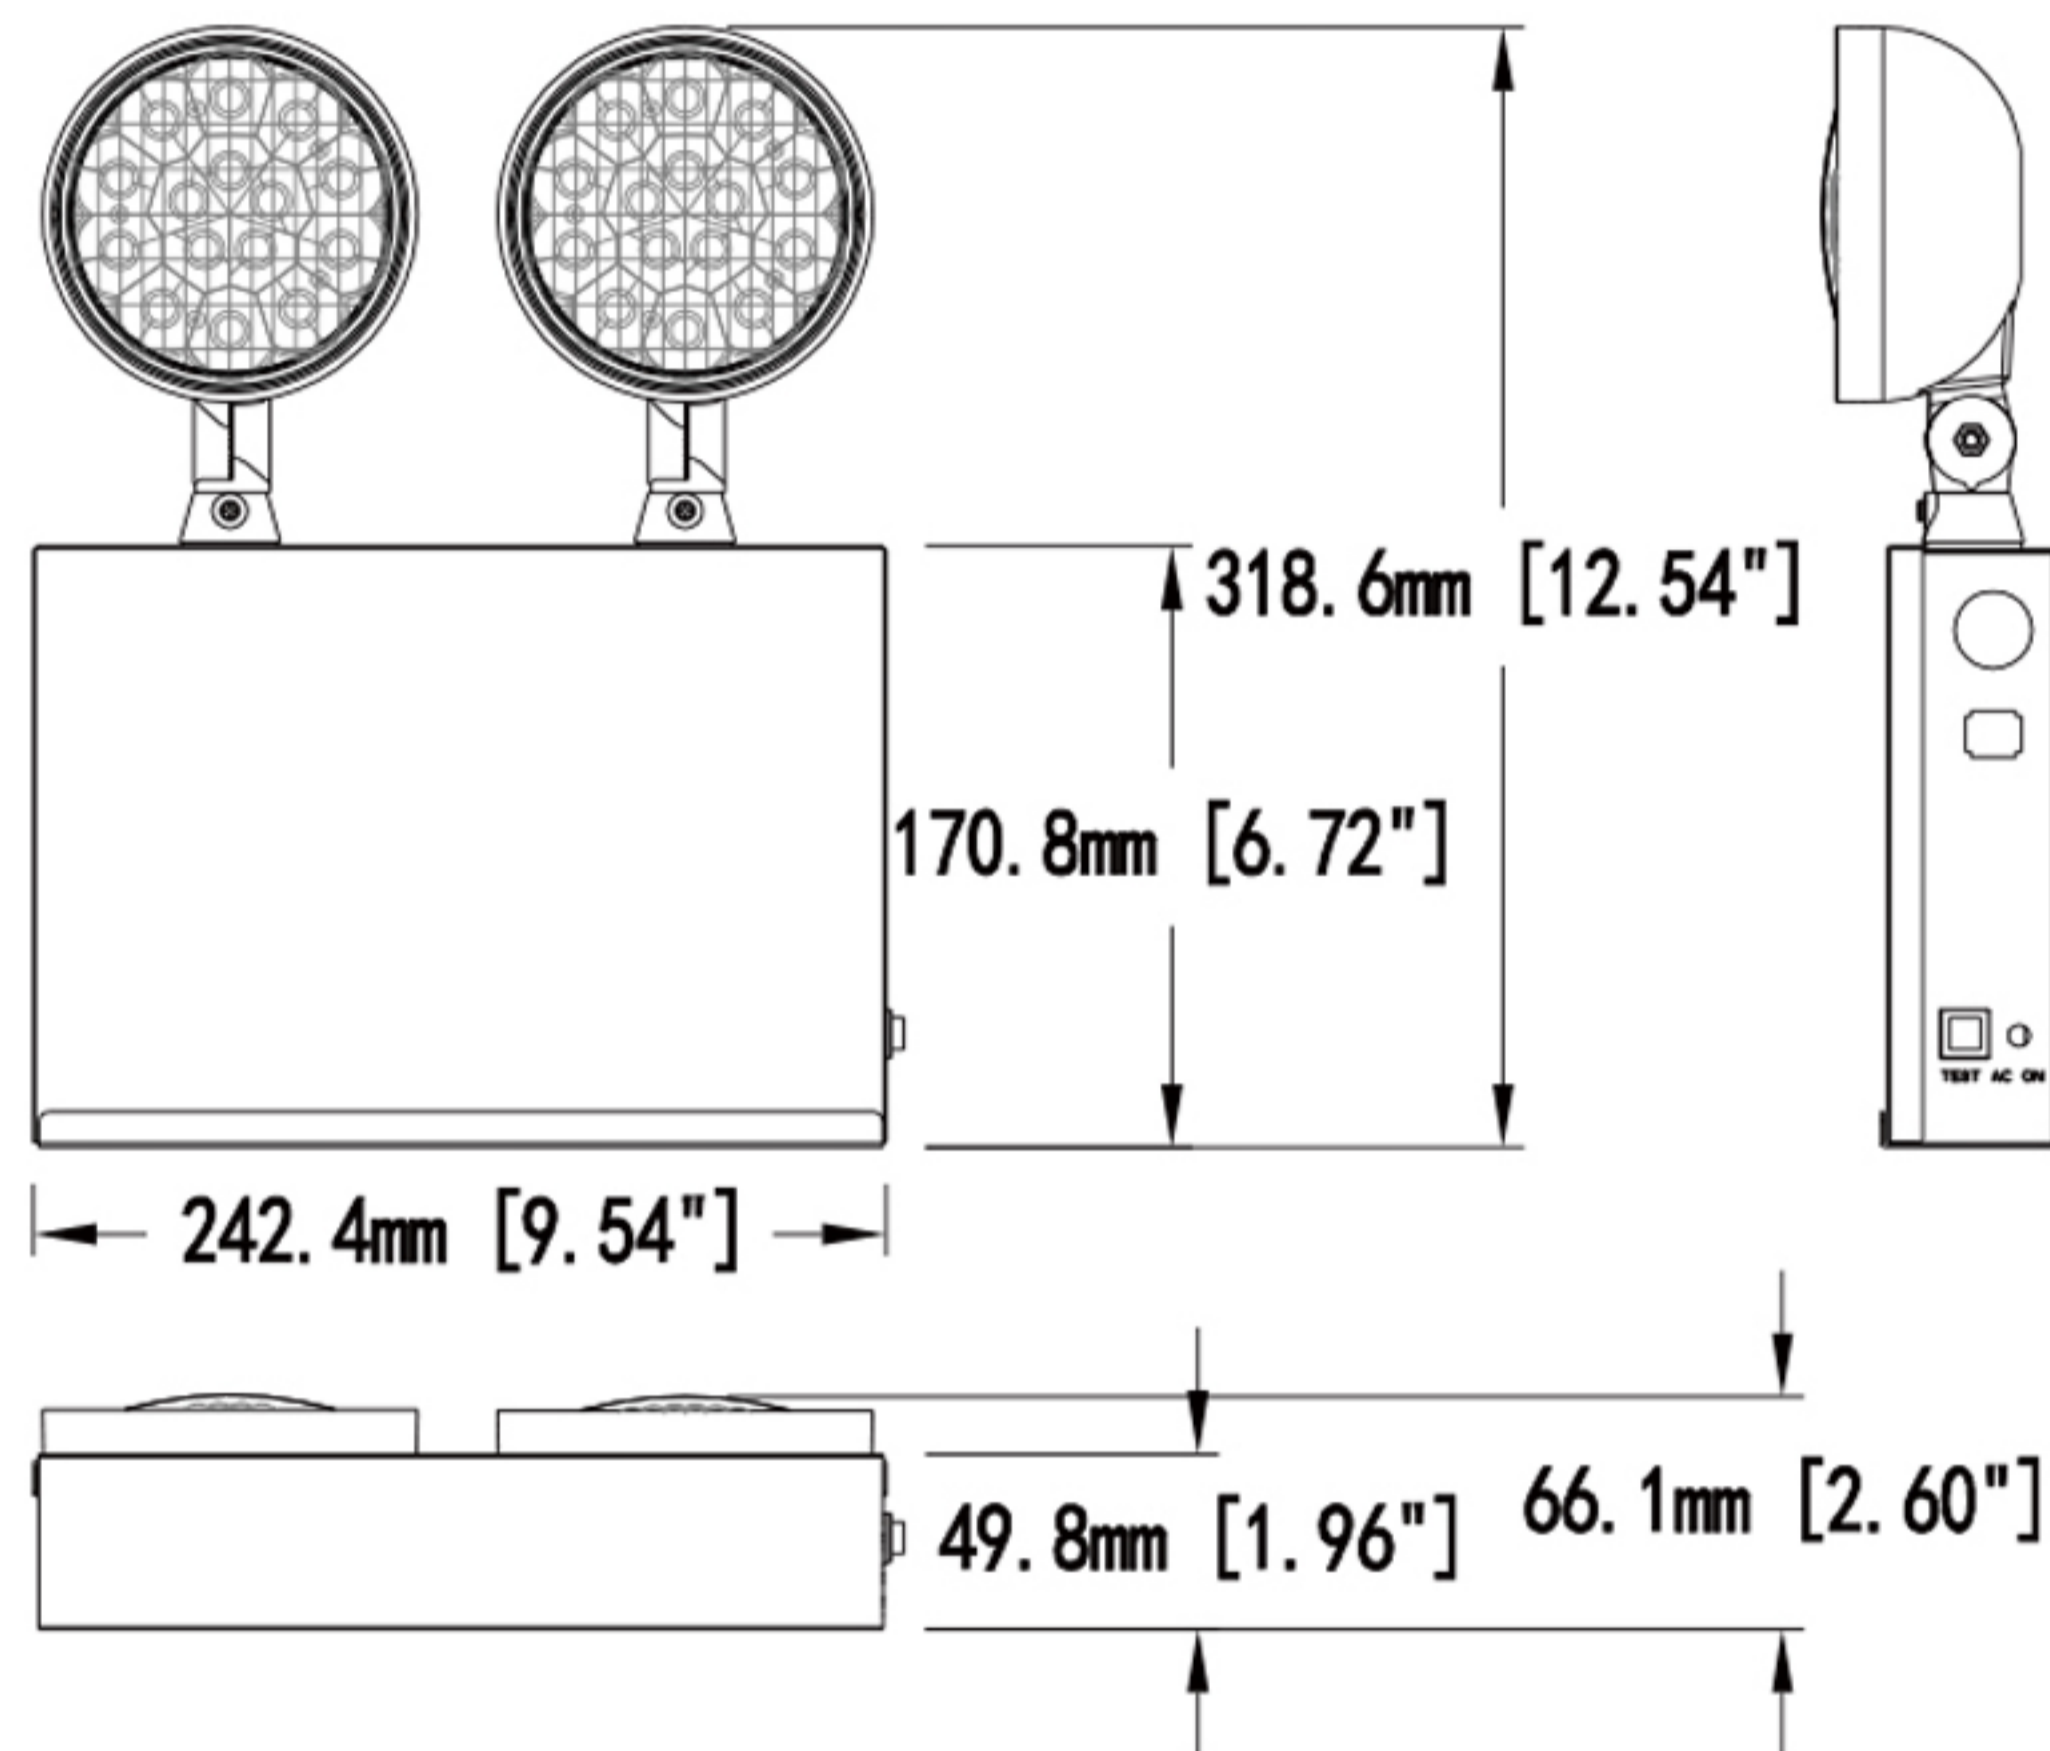

ILLUMINATION

- Long lasting efficient ultra bright white LED lamp heads.
- 2.0W 15 LEDs 2835 per head.
- Total Light Output 350Lm.

MOUNTING

- External mounting brackets for simplified wall mounting.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity of 4.0W standard in operating temperatures of 0°C - 50°C.

HOUSING

- Standard finish, durable white powder coat.
- Steel units fabricated of 20 gauge steel
- Conduit knockouts and rear keyhole mounting knockouts provided

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.

ORDERING INFORMATION

Model	Housing	Options
LEDEMNY	W White B Black	2H Discharging Time 3H Discharging Time 4H Discharging Time