



FIXED OR ADJUSTABLE OPTICS LED EMERGENCY UNIT

DIMENSIONS

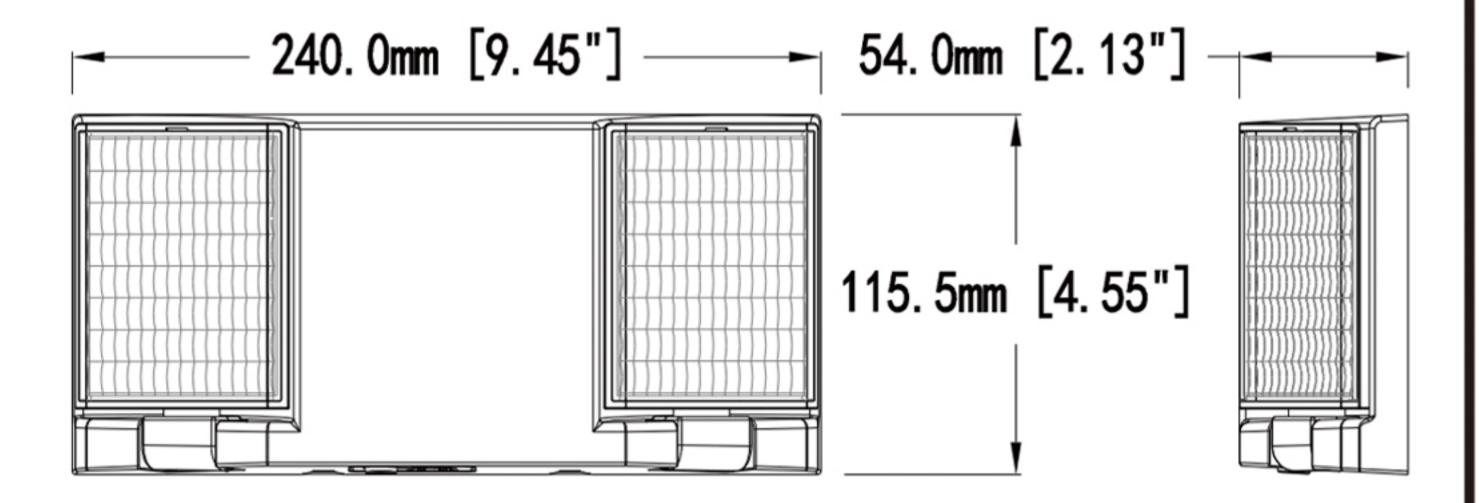

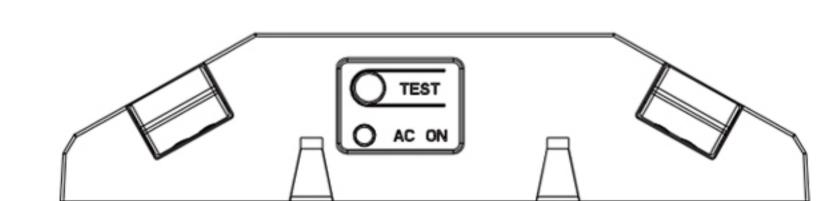

ILLUMINATION

- Long-life, effecint ultra-bright white LED lamp heads.
- High-performance, chrome-plated metallized reflector and plastic lens for optimal light distribution.
- Two fixed or adjustable LED lamp heads provide optimal center-to-center spacing.

MOUNTING

- Surface mount via easy connect back plate, which fits most standard junction boxes and snaps into place making internal electrical connections.
- Suitable for wall or ceiling mount.

ELECTRICAL

- 120-347V.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- Long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

HOUSING

 Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for five years.
- Damp locations.

ORDERING INFORMATION

| Model | Housing |
|---------|---------|
| LEDEMFA | W White |
| | B Black |