


PCRM



ALL LED RUNNING MAN SIGN & EMERGENCY THERMOPLASTIC COMBO

DIMENSIONS

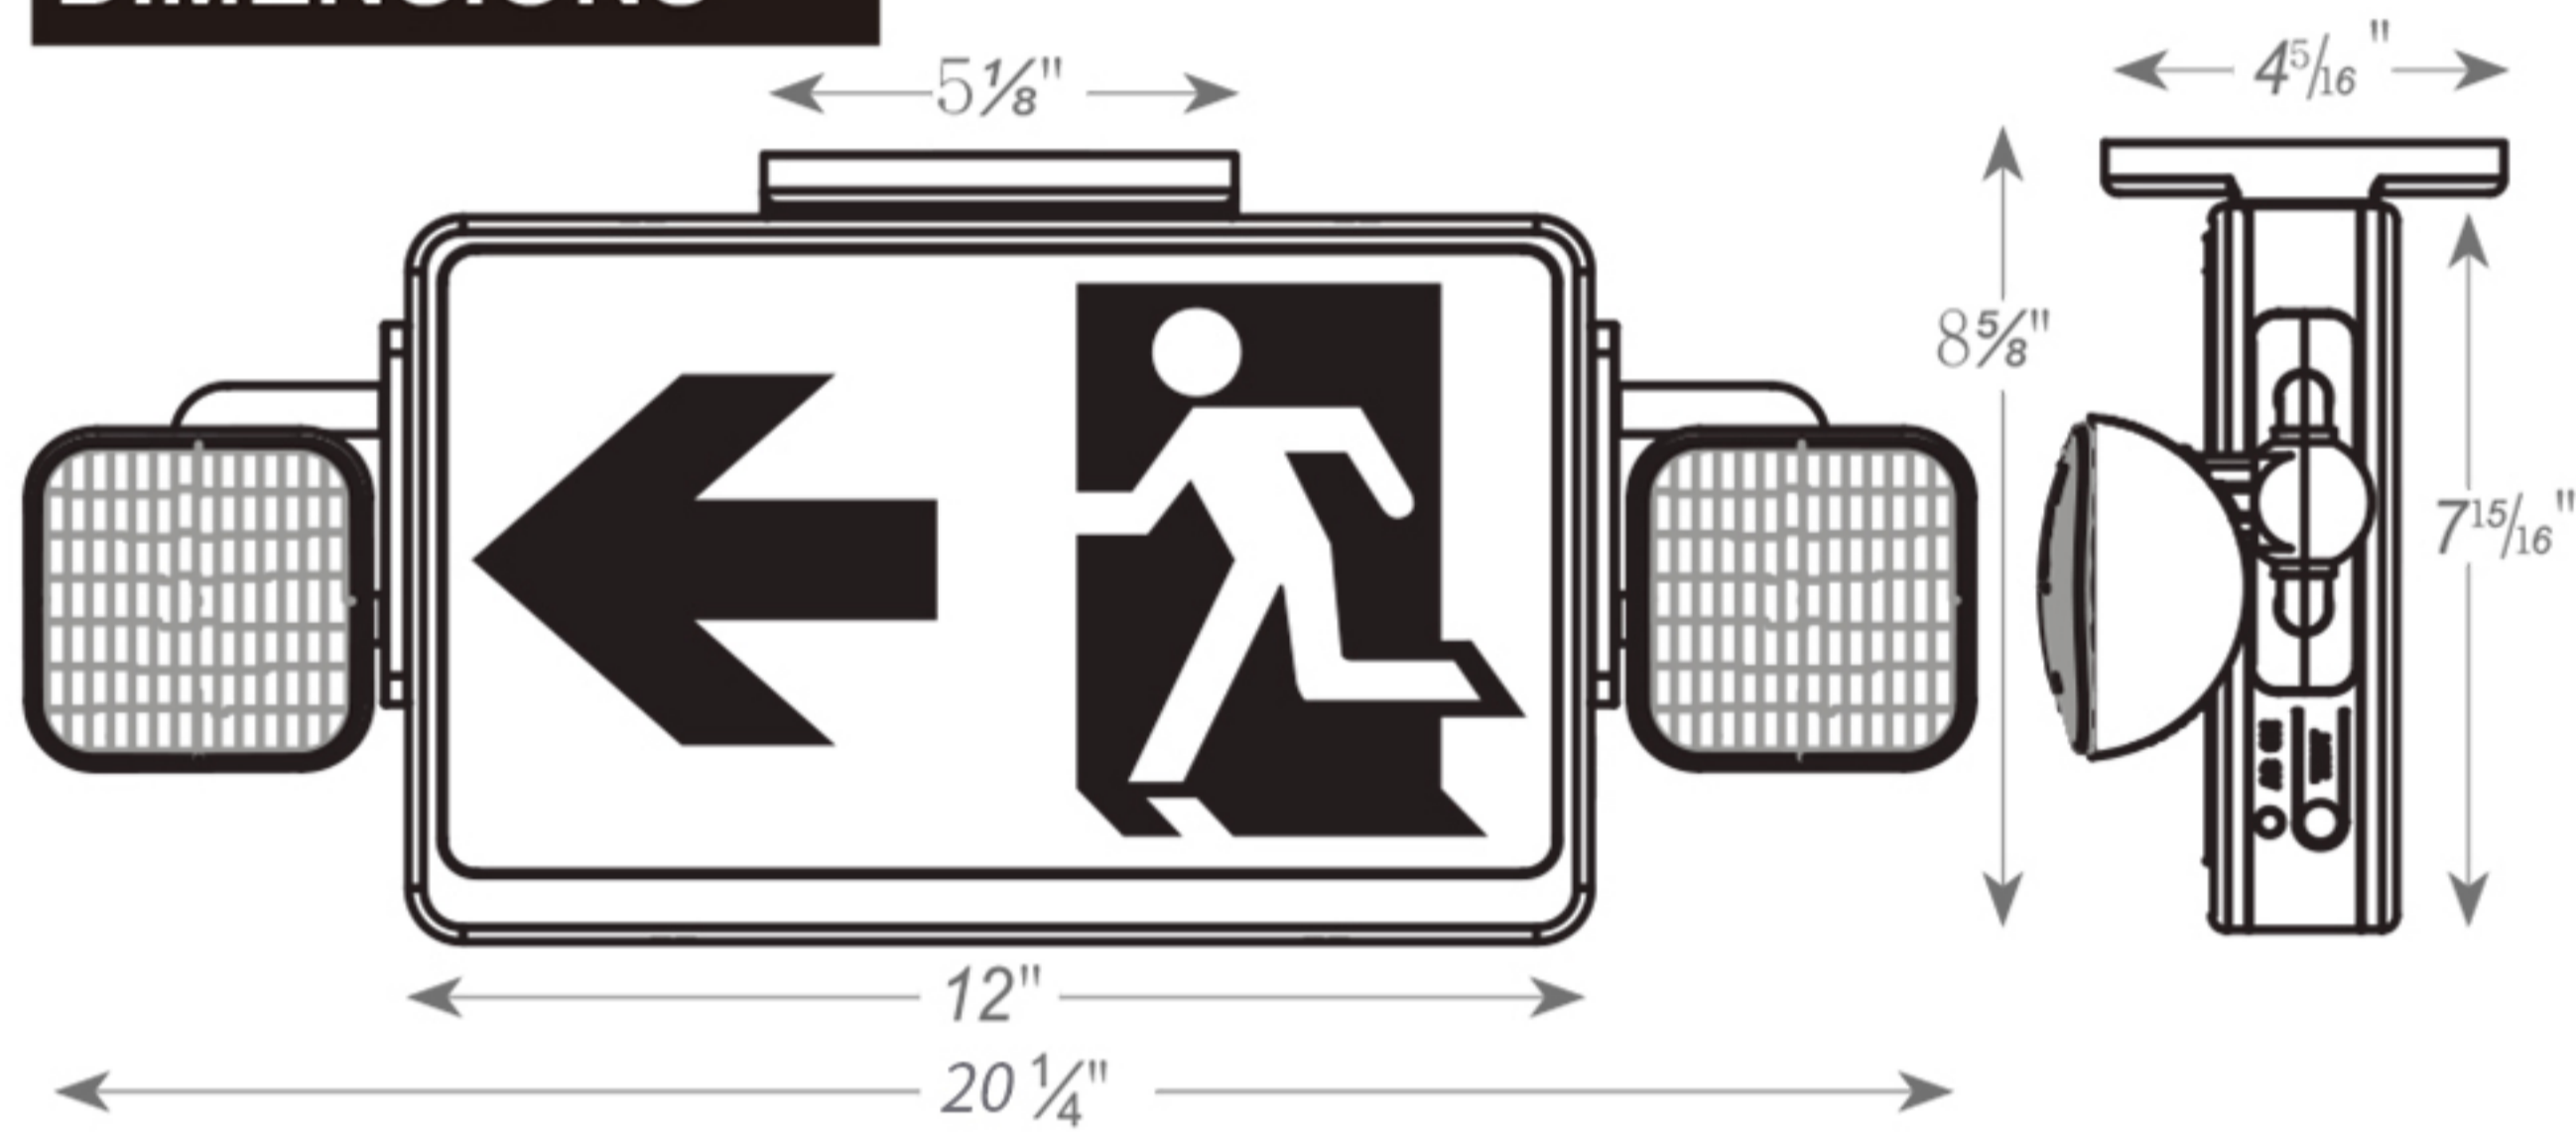

ILLUMINATION

- Long lasting, efficient ultra bright white LED lamp heads.
- 1.5 watt (12 LEDs x 0.125W) per head.
- High performance chrome-plated metallized reflector and plastic lens for optimal light distribution.
- Adjustable LED lamp heads provides optimal center-to-center spacing.
- Ultra bright, energy efficient, long-lasting white LED provides even, fully illuminated panel.

ELECTRICAL

- 120-347V.
- Charge rate/power " ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.
- Field selectable, universal directional indication provided with three (Left, Right and No Arrow) pictogram legends.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- CSA listed for damp locations (0°C - 50°C.).
- Meets or exceeds CSA C22.2 No. 141.15 standard requirements for Emergency lighting equipment.

ORDERING INFORMATION

Model	No. of faces	Housing
PCRM	Universal Single	W White
	Double Face	B Black